




bizhub c751i Color A3 multifunctional



Giving Shape to Ideas

CUSTOMER BENEFITS

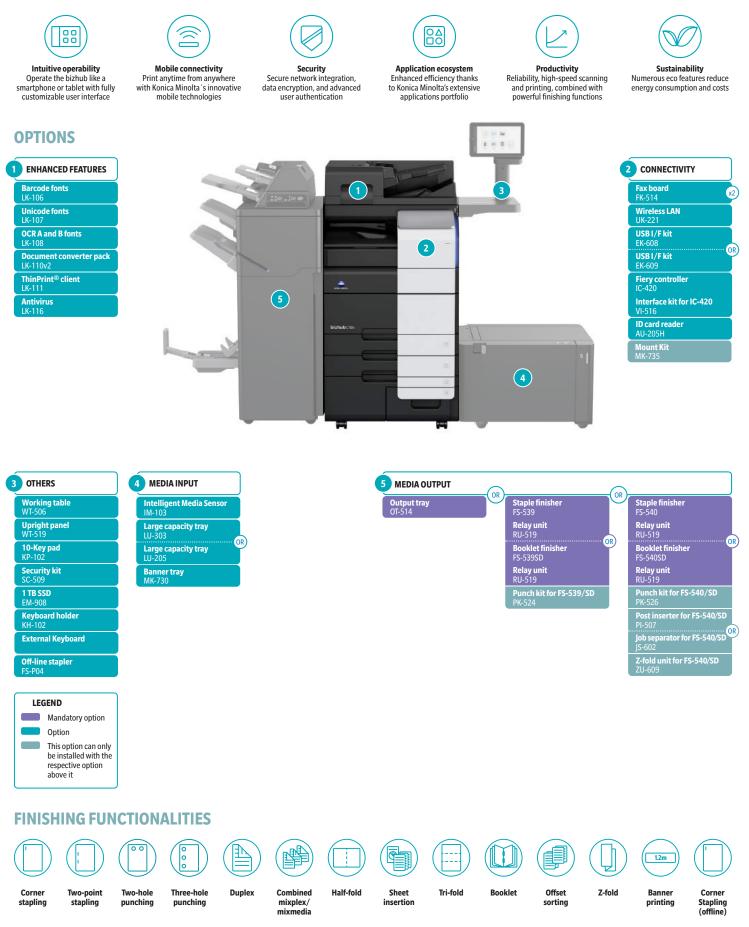

DESCRIPTION

ENHANCED FEATURES

LK-106 Barcode fonts	Supports native barcode printing
LK-107 Unicode fonts	Supports native Unicode printing
LK-108 OCR A and B fonts	Supports native OCR A and B font printing
LK-110v2 Document converter pack	Supports Searchable PDF, PDF encryption, PDF/A, linearized
	PDF file formats, and generates OOXML (DOCX, XLSX, etc.)
	file formats.
LK-111 ThinPrint [®] client	Print data compression for reduced network impact
LK-116 Antivirus	Bitdefender [®] antivirus provides real time scanning of all
	incoming and outgoing data

CONNECTIVITY

FK-514 Fax board	Super G3 fax, digital fax functioality
UK-221 Wireless LAN	Wireless LAN and wireless LAN Access Point Mode
EK-608 USB I/F kit	USB keyboard connection
EK-609 USB I/F kit	USB keyboard connection; Bluetooth
IC-420 Fiery controller	Professional color print controller
VI-516 Interface kit for IC-420	Fiery controller interface card
AU-205H ID card reader	Various ID card technologies
MK-735 Mount kit	Installation kit for ID card reader

WT-506 Working table	Authentication device placement
WT-519 Working table	Working table for upright panel
KP-102 10-Key pad	For numeric entry instead of touchscreen
SC-509 Security kit	Copy guard function
EM-908 1 TB SSD	1 TB SSD to increase storage space
KH-102 Keyboard holder	To place USB keyboard
External Keyboard	Keyboard for alpha numeric data entry
FS-P04 Offline Stapler	20-sheet off-line stapling
MEDIA INPUT	
LU-303 Large capacity tray	3,000 sheets, 8.5" x 11", 52-256 g/m ²
LU-205 Large capacity tray	2,500 sheets, 8.5" x 11" - 12" x 18", 52-256 g/m ²
MK-730 Banner tray	Multipage banner feeding
MK-730 Banner tray	Multipage banner feeding
	Multipage banner feeding
MEDIA OUTPUT	Multipage banner feeding Output tray used instead of finisher
MEDIA OUTPUT DT-514 Output tray	
MK-730 Banner tray MEDIA OUTPUT OT-514 Output tray FS-539 Staple finisher FS-539SD Booklet finisher	Output tray used instead of finisher
MEDIA OUTPUT 0T-514 Output tray FS-539 Staple finisher	Output tray used instead of finisher 50-sheet stapling; 3,200 sheets max. output
MEDIA OUTPUT DT-514 Output tray S-539 Staple finisher S-539SD Booklet finisher	Output tray used instead of finisher 50-sheet stapling; 3,200 sheets max. output 50-sheet stapling; 20-sheet booklet finisher;
MEDIA OUTPUT DT-514 Output tray FS-539 Staple finisher FS-539SD Booklet finisher PK-524 Punch kit for FS-539/SD	Output tray used instead of finisher 50-sheet stapling; 3,200 sheets max. output 50-sheet stapling; 20-sheet booklet finisher; 2,200 sheets max. output
MEDIA OUTPUT DT-514 Output tray FS-539 Staple finisher FS-539SD Booklet finisher PK-524 Punch kit for FS-539/SD FS-540 Staple finisher	Output tray used instead of finisher 50-sheet stapling; 3,200 sheets max. output 50-sheet stapling; 20-sheet booklet finisher; 2,200 sheets max. output 2/3 hole punching; autoswitching
MEDIA OUTPUT DT-514 Output tray SS-539 Staple finisher SS-539SD Booklet finisher PK-524 Punch kit for FS-539/SD SS-540 Staple finisher	Output tray used instead of finisher 50-sheet stapling; 3,200 sheets max. output 50-sheet stapling; 20-sheet booklet finisher; 2,200 sheets max. output 2/3 hole punching; autoswitching 100-sheet stapling; 3,200 sheets max. output
MEDIA OUTPUT DT-514 Output tray SS-539 Staple finisher SS-539SD Booklet finisher PK-524 Punch kit for FS-539/SD SS-540 Staple finisher SS-540SD Booklet finisher	Output tray used instead of finisher 50-sheet stapling; 3,200 sheets max. output 50-sheet stapling; 20-sheet booklet finisher; 2,200 sheets max. output 2/3 hole punching; autoswitching 100-sheet stapling; 3,200 sheets max. output 100-sheet stapling; 20-sheet booklet finisher; 100-sheet stapling; 3,200 sheets max. output
MEDIA OUTPUT DT-514 Output tray FS-539 Staple finisher FS-539SD Booklet finisher PK-524 Punch kit for FS-539/SD FS-540 Staple finisher FS-540SD Booklet finisher PK-526 Punch kit for FS-540/SD	Output tray used instead of finisher 50-sheet stapling; 3,200 sheets max. output 50-sheet stapling; 20-sheet booklet finisher; 2,200 sheets max. output 2/3 hole punching; autoswitching 100-sheet stapling; 3,200 sheets max. output 100-sheet stapling; 20-sheet booklet finisher; 2,700 sheets max. output
MEDIA OUTPUT OT-514 Output tray FS-539 Staple finisher FS-539SD Booklet finisher PK-524 Punch kit for FS-539/SD FS-540 Staple finisher FS-540SD Booklet finisher PK-526 Punch kit for FS-540/SD RU-519 Relay unit	Output tray used instead of finisher 50-sheet stapling; 3,200 sheets max. output 50-sheet stapling; 20-sheet booklet finisher; 2,200 sheets max. output 2/3 hole punching; autoswitching 100-sheet stapling; 3,200 sheets max. output 100-sheet stapling; 20-sheet booklet finisher; 2,700 sheets max. output 2/3 hole punching; autoswitching 100-sheet stapling; 20-sheet booklet finisher; 2,700 sheets max. output 2/3 hole punching; auto switching
MEDIA OUTPUT 0T-514 Output tray FS-539 Staple finisher	Output tray used instead of finisher 50-sheet stapling; 3,200 sheets max. output 50-sheet stapling; 20-sheet booklet finisher; 2,200 sheets max. output 2/3 hole punching; autoswitching 100-sheet stapling; 3,200 sheets max. output 100-sheet stapling; 20-sheet booklet finisher; 2,700 sheets max. output 2/3 hole punching; auto switching For FS-539/SD or FS-540/SD installation

TECHNICAL SPECIFICATIONS

SYSTEM SPECIFICATIONS

STSTEM SPECIFICATIONS	
System speed letter	Up to 75/70 ppm (mono/color)
System speed 11" x 17"	Up to 37/35 ppm (mono/color)
Auto duplex speed letter	Up to 75/70 ppm (mono/color)
1st page out time letter	2.8/3.8 sec. (mono/color)
Warm-up time	Approx. 17/18 sec. (mono/color) ¹
Imaging technology	Laser
Toner technology	Simitri [®] HD polymerized toner
Panel size/resolution	10.1" / 1024 x 600
System memory	8,192 MB (standard/max)
Solid state drive	256 GB SSD (standard) / 1 TB SSD (optional)
Interface	10/100/1,000-Base-T Ethernet; USB 2.0;
	Wi-Fi 802.11 b/g/n/ac (optional)
Network protocols	TCP/IP (IPv4 / IPv6); SMB; LPD; IPP; SNMP; HTTP(S); Bonjour
Automatic document feeder	Up to 300 originals; 4.13" x 5.83" - 11" x 17"; 35-210 g/m ² ;
	Dual scan ADF
ADF double feed detection	Standard
Printable paper size	3.5" x 5.5" - 12" x 18"; custom paper sizes,
	banner paper max. 47.2" x 11.7"
Printable paper weight	52-300 g/m ²
Paper input capacity	3,650 sheets / 6,650 sheets (standard/max)
Paper tray input (standard)	1x 500; 3.5" x 5.5" – 11" x 17"; custom sizes; 52–256 g/m ²
	1x 500; 5.5" x 8.5" – 12" x 18"; custom sizes; 52–256 g/m ²
	1x 1,500; 5.5" x 8.5" – 8.5" x 11"; 52–256 g/m²
	1x 1,000; 5.5" x 8.5" – 8.5" x 11"; 52–256 g/m²
Large capacity tray (optional)	1x 3,000; 8.5" x 11"; 52–256 g/m ²
	1x 2,500; 8.5" x 11" - 12" x 18"; custom sizes; 52-256 g/m ²
Manual bypass	150 sheets; 3.5" x 5.5" - 12" x 18"; custom sizes; banner;
	60-300 g/m ²

SYSTEM SPECIFICATIONS

ZU-609 Z-fold unit for FS-540/SD Z-fold for 11" x 17" prints

••••••	
Finishing modes (optional)	Offset; Group; Sort; Staple; Staple (offline); Punch; Half-fold;
	Letter-fold; Booklet; Post insertion; Z-fold
Automatic duplexing	3.5" x 5.5" – 12" x 18"; 52–256 g/m²
Output capacity	Up to 200 sheets / up to 3,300 sheets (standard/max)
Stapling	Max. 100 sheets or 98 sheets + 2 cover sheets (up to 300 g/m ²)
Stapling output capacity	Max. 200 sets
Letter fold	Max. 3 sheets
Letter fold capacity	Max. 50 sets; unlimited (without tray)
Booklet	Max. 20 sheets or 19 sheets + 1 cover sheet (up to 300 g/m^2)
Booklet output capacity	Max. 35 booklets; unlimited (without tray)
Duty cycle (monthly)	Max. ² 300,000 pages
Toner lifetime	Black up to 45,000 pages
	CMY up to 45,000 pages
Imaging unit lifetime	Black up to 240,000/1,000,000 pages (drum/developer)
	CMY up to 165,000/1,000,000 pages (drum/developer)
Power consumption	110-120V/ 50/60 Hz; Less than 2.10 kW
System dimension (W x D x H)	24.2" x 27.1" x 47.5" (without options)
System weight	Approx. 353 lbs. (without options)

PRINTER SPECIFICATIONS

Print resolution	1,800 (equivalent) x 600 dpi; 1200 x 1200 dpi
Page description language	PCL 6 (XL3.0); PCL 5c; PostScript 3 (CPSI 3016); XPS
Operating systems	Windows 7 (32/64); Windows 8.1 (32/64); Windows 10 (32/64);
	Windows Server 2008 (32/64); Windows Server 2008 R2;
	Windows Server 2012; Windows Server 2012 R2;
	Windows Server 2016; Windows Server 2019; Macintosh OS X
	10.11 or later; Unix; Linux; Citrix
Printer fonts	80 PCL Latin; 137 PostScript 3 Emulation Latin

4

PRINTER SPECIFICATIONS	
Mobile printing	AirPrint (iOS); Mopria (Android);
	Konica Minolta Print Service (Android);
	Konica Minolta Mobile Print (iOS/Android)
	Optional: Wi-Fi Direct

PRINTER SPECIFICATIONS (OPTIONAL)

Print controller	Embedded Fiery IC-420
Controller CPU	AMD GX-424CC @ 2.4 GHz
Memory/HDD	4,096 MB / 500 GB
Page description language	PostScript 3 (3016) Emulation; PCL 6 (XL Version 3.0 Emulation,;
	PCL 5e/c Emulation; XPS Version 1.0
Operating systems	Windows 10 (32/64); Windows 11; Windows Server 2012;
	Windows Server 2012 R2; Windows Server 2016;
	Windows Server 2019; Windows Server 2022;
	macOS 10.14 or later; Unix; Linux; Citrix

SCANNER SPECIFICATIONS

Scan speed	Up to 140/140 ipm in simplex (mono/color)
	Up to 280/280 ipm in duplex (mono/color)
Scan resolution	Up to 600 x 600 dpi
Scan modes	Scan-to-eMail (Scan-to-Me); Scan-to-SMB (Scan-to-Home);
	Scan-to-FTP; Scan-to-Box; Scan-to-USB; Scan-to-WebDAV;
	Scan-to-DPWS; Scan-to-URL; TWAIN scan
File formats	JPEG; TIFF; PDF,Compact PDF; Encrypted PDF; XPS;
	Compact XPS; PPTX; PDF/A 1a and 1b
	optional: Searchable PDF; Searchable DOCX/PPTX/XLSX
Scan destinations	2,000 destinations + 100 groups; LDAP support

COPIER SPECIFICATIONS

Copy resolution	600 x 600 dpi
Gradation	256 gradations
Multicopy	1-9,999
Original format	Max. 11" x 17"
Magnification	25-400% in 0.1% steps; Auto-zoom

FAX SPECIFCIATION

Fax standard	Super G3 (optional)
Fax transmission	Analog; i-Fax; Color i-Fax
Fax resolution	Up to 600 x 600 dpi
Fax compression	MH; MR; MMR; JBIG
Fax modem	Up to 33.6 Kbps
Fax destinations	2,000 single + 100 groups



For complete information on Konica Minolta products and solutions, please visit: **CountOnKonicaMinolta.com**

© 2024 KONICA MINOLTA BUSINESS SOLUTIONS U.S.A., INC. All rights reserved. Reproduction in whole or in part without written permission is prohibited. KONICA MINOLTA, the KONICA MINOLTA logo and bizhub are registered trademarks or trademarks of KONICA MINOLTA, INC. All other product and brand names are trademarks or registered trademarks of their respective companies or organizations. All features and functions described here may not be available on some products. Design & specifications are subject to change without notice.

Storable documents	Up to 3,000 documents or 10,000 pages
User boxes	Public; Personal (with password or authentication);
	Group (with authentication)
System boxes	Secure print; Encrypted PDF print; Fax receipt; Fax polling
SYSTEM FEATURES	
Security	ISO 15408 HCD-PP Common Criteria (in evalutation);
	IP filtering and port blocking; SSL3 and TLS1.0/1.1/1.2 network
	communication; IPsec support; IEEE 802.1x support; User
	authentication; Authentication log; Secure print; Kerberos;
	Overwrite all data function; SSD self-encryption (AES 256)/
	Storage lock password; Confidential fax;
	Print user data encryption
Security function (optional)	Antivirus realtime scanning (Bitdefender®);
	Copy protection (Copy Guard; Password Copy)
Accounting	Up to 1,000 user accounts;
	Active Directory support (user name + password + e-mail + smb folder)
	User function access definition;
	Authentication by mobile device (Android)
	ID card authentication (ID card reader);
	Authentication by mobile device (iOS)
Software	Net Care Device Manager; Data Administrator;

¹ Warm-up time may vary depending on the operating environment and usage

² If the maximum volume is reached within a period of one year, then a maintenance cycle must be performed

- All specifications refer to 8.5" x 11"-size paper of 80 g/m² quality.

- The support and availability of the listed specifications and functionalities varies depending on operating systems, applications and network protocols as well as network and system configurations.
 The stated life expectancy of each consumable is based on specific operating conditions such as page coverage
- The stated life expectancy of each consumable is based on specific operating conditions such as page coverage for a particular page size (5% coverage of 8.5" x 11"). The actual life of each consumable will vary depending on use and other printing variables including page coverage, page size, media type, continuous or intermittent printing, ambient temperature and humidity.
- Some of the product illustrations contain optional accessories.
- Specifications and accessories are based on the information available at the time of printing and are subject to change without notice.
- Konica Minolta does not warrant that any specifications mentioned will be error-free.
- All brand and product names may be registered trademarks or trademarks of their respective holders and are hereby acknowledged.



KONICA MINOLTA BUSINESS SOLUTIONS U.S.A., INC. 100 Williams Drive, Ramsey, New Jersey 07446

CountOnKonicaMinolta.com

